




Amulet™ 300/350 Next Generation IPTV DVR

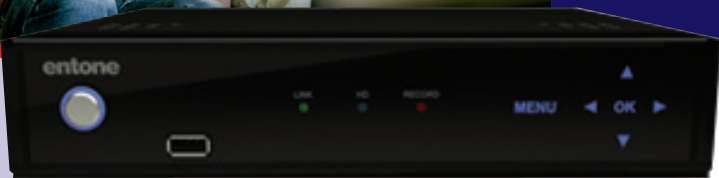

Robust & Flexible Platform for Advanced Media Delivery

Amulet is a next-generation SD/HD MPEG-4 IPTV receiver that offers a cost-effective way to deliver high-quality video services. Compact and stylish, yet Amulet is a powerful and flexible platform for advanced media delivery. It decodes popular video formats including MPEG-4 (AVC/H.264), MPEG-2, VC-1 and DivX, as well as advanced audio format decodes and transcoding capability.

Modular Networking & Expandable DVR Options

Amulet easily integrates with existing home-networks and broadband services. The integrated Ethernet connection can be augmented by either a HomePNA, 802.11, MoCA or HomePlug adapter. With Amulet, subscribers can access and manage a variety of traditional broadband services, as well as extend the capabilities of their existing IP home networks for more content delivery choices.

Amulet also supports external SATA hard disk drive attachment for digital video recorder (DVR) applications. With its expandable DVR options, Amulet offers service providers the flexibility to deploy DVR while offering subscribers more storage options. Whole-home DVR can be enabled without the hassles of costly equipment replacements or truck rolls.

Optimum Performance

The dual-core MIPS32® CPU and advanced 2D graphics acceleration engine provide for a responsive and compelling user experience. It supports popular third-party middleware and digital rights management (DRM) solutions such as Conklin, Ericsson, Latens, Minerva, Nokia Siemens Networks, Verimatrix, and Widevine.

Amulet enables service providers to increase their subscriber base and generate more revenue by offering subscribers more advanced services and an enhanced user experience.

Key Features

- ◆ Easily integrates with existing in-home networks and broadband services
- ◆ Supports advanced video and audio formats, including MPEG-4 (AVC/H.264), VC-1, DivX, Dolby Digital, Windows Media, MP3
- ◆ Supports popular networking technologies: HomePNA, 802.11, MoCA, and HomePlug
- ◆ Dual processor and advanced 2D graphics acceleration engine
- ◆ External SATA support for flexible DVR applications

entone®

connecting the home™

Technical Specifications

Video Formats

- HD/SD H.264/AVC Main and High Profile to Level 4.1 (HD), Level 3.1 (SD)
- VC-1 Advanced Profile @ Level 3, Simple and Main Profile
- HD/SD MPEG-2 Main Profile at Main and High levels
- MPEG still image decode
- SD MPEG-4 P2 SP/ASP
- HD DivX 3.11/4.11/5.x/6x/Home Theater

Audio Formats

- AAC LC, AAC LC+SBR Level 2, AAC+ Level 2, AAC-HE
- Dolby® Digital, Dolby Digital Plus
- MPEG I layers 1, 2, and 3 (MP3)
- Windows Media® and Windows Media Pro audio
- 3D SRS audio support
- Transcoding operations including AAC to DTS 5.1 or AC3+ to AC3

Advanced Graphics

- High-performance 2D-effects graphic engine
- Studio-quality text and graphics at HD resolution
- Digital noise and contour reduction (DNR/DCR)
- Motion-adaptive de-interlacer with reverse 3:2/2:2 pull-down

Video Outputs

- NTSC-M/J, PAL-BDGHIN/M/Nc, SECAM analog outputs
- 480i/480p/576i/576p/720p/1080i/1080p output formats
- Component RGB/YPrPb HD/HD-DVO outputs
- Macrovision® 7.1/NICAM support
- HDMI 1.3/DVI 1.0 Mac and PHY with HDCP 1.1

Content Security

- AES/1DES/3DES/CSS/CPRM/DTCP copy protection
- MPEG-2/DIRECTV/DVB/ARIB data transport demux with 1DES/3DES/DVB/Multi2/AES descramblers

Back Panel Connectors

- RJ-45 10/100Base-T Ethernet with integrated status LEDs
- Dual USB 2.0 Host Type A
- HDMI
- eSATA
- DC power
- S/PDIF optical transmitter
- S-video
- RF output
- RCA component and composite video

Front Panel

- Illuminated power standby button
- Indicators for network status, HD and recording status
- Capacitive touchpad with "Menu", "OK", and directional arrows (Model 350 only)
- Single USB 2.0 Host Type A
- IR receiver

Internal Network Options (Model 350 Only)

- HomePNA 3.1
- 802.11 b/g/n WiFi
- MoCA
- HomePlug adapter (external)

CPU and Memory

- Broadcom BCM7405 with 400-MHz Dual-Core CMT MIPS32/16e class processor
- 256MB (Model 300) / 512MB (Model 350)

Mechanical

- 9.25w x 7d x 1.75h inches
- 5-35°C (40-95°F), 30-95% relative humidity operating temperature
- Power 1.2A maximum at 12V

Global Headquarters

20863 Stevens Creek Blvd, Suite 300
Cupertino, CA 95014
U.S.A.
T: +1 (408) 861-1400
F: +1 (650) 240-0135

Asia Pacific

Level 28, Saxon Tower
7 Cheung Shun Street, Lai Chi Kok
Hong Kong
T: +852 3148 3500
F: +852 3148 3588

Europe, Middle East & Africa

Gaston Crommenlaan 4-B501, 9th Floor
B-9050 Ghent
Belgium
T: +32 9 281 17 53
F: +32 9 270 33 15

www.entone.com

© 2011 Entone, Inc. Entone, Amulet, Hydra and connecting the home are trademarks of Entone, Inc. Other company, product and service names may be trademarks or service marks of others. All information contained in this document is subject to change without notice. Information contained in this document is provided on an as is basis. In no event will Entone be liable for damages arising directly or indirectly from any use of the information contained in this document. Subject to change without notice.

DS-V2.0511NA